


www.ileafdoors.com



MADE EASY. SMART CHOICE. I-Leaf BuildproPvt. Ltd, (An ISO 9001-2015 Certified company) was established in the year 2005. I-Leaf is India's one of the oldest, most trusted, durable and best quality steel door brand. The company deals in steel doors, steel windows, FRP doors and smart security locks & Viewers. I-Leaf has specialized in both import and in-house production and marketing of full range of doors and windows. I-Leaf doors and windows are conducive to all weather conditions and can adapt to variegated construction requirements and designs.

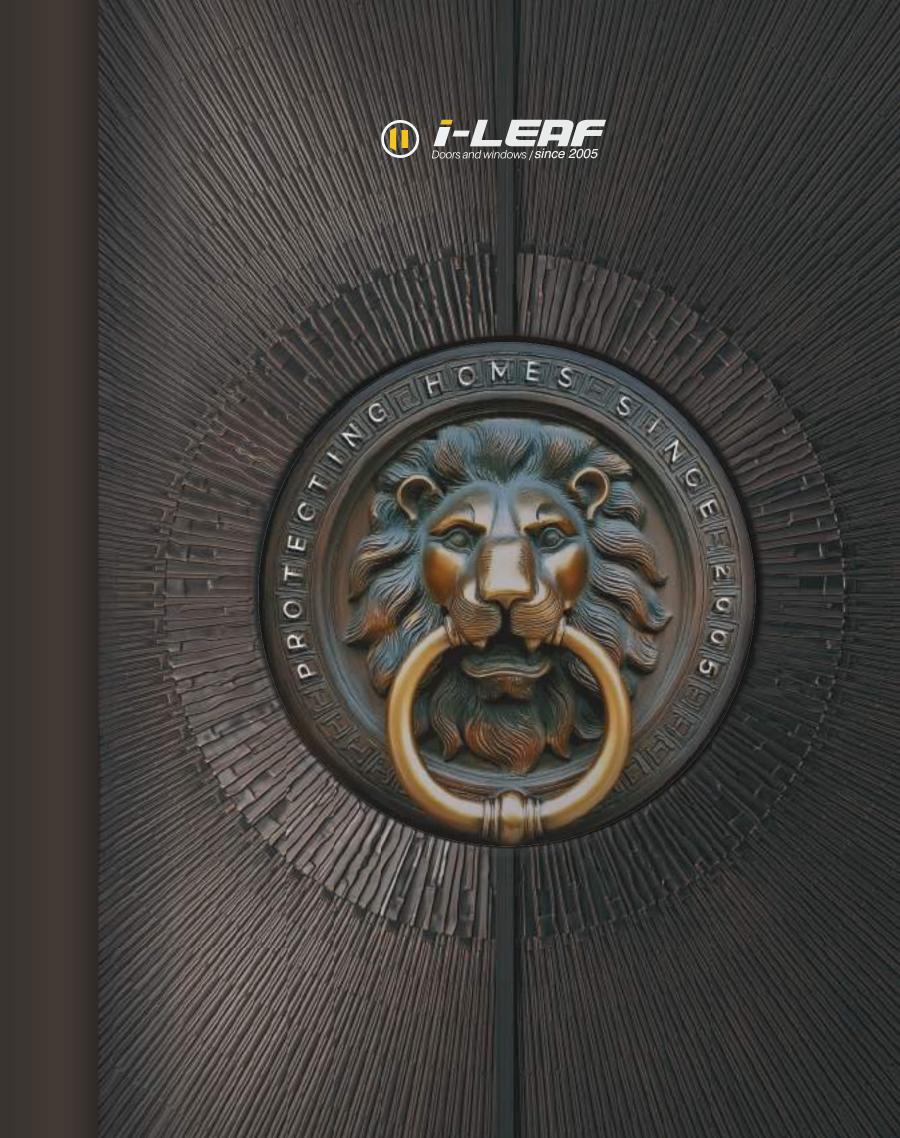

EVERY SECURE, DOOR OPENS GREENER **GREENER TOMORROW**

we create sanctuaries of **security**, **style**, and **sustainability**.

A MISSION TO PROTECT YOUR WORLD AND **SHAPE THE FUTURE**

With 20 years of expertise, we offer:

- State-of-the-art security with smart and
- Timeless aesthetics, blending wood textures
- Eco-friendly solutions using 100% recyclable materials.

i-LEAF - PROTECTING WHAT MATTERS MOST.











WHY PROTECT CHOOSE YOUR HOME, I-LEAF STEEL PRESERVE THE PLANET

When you choose i-Leaf Steel Doors, you're securing your homewhile committing to sustainability and style.

- **Eco-Friendly:** No wood, no deforestation—every
- Durable: High-quality steel resists warping, swelling,
- **Effortless Installation:** Lightweight yet robust, our
- Stylish & Strong: Timeless wood-like elegance
- Cost-Effective: 100% recyclable and built to last,

WITH i-LEAF, YOU'RE CHOOSING SMART SECURITY THAT PROTECTS YOUR HOME AND THE PLANET.











MADE OF HIGH
QUALITY CAST
ALUMINIUM,
GALVALUME
SHEETS &
CARBONATED
WOOD WITH
SEVERAL UNIQUE
FEATURES.

EASY

TO
INSTALL







IL GL SG121

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVALUME SHEETS WITH SUPERIOR LOCKS, HARDWARES AND ACCESSORIES WITH SEVERAL UNIQUE FEATURES

- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- Door panel stuffing: Rock wool/honey comb paper and strengthen with middle panels
- > Lock multi-point, multi-position lever and half circle locking systems , sawing resistant lock point
- > UV protected, termite, sound and dust proof, anticorrosive,
- > Cylinder: Super prying resistant
- > Copper coated 304 SS hinges and peep hole viewer.
- Easy to install, aesthetic finish
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY



IL GL JP02

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVALUME SHEETS WITH SUPERIOR LOCKS, HARDWARES AND ACCESSORIES WITH SEVERAL UNIQUE FEATURES

- Structured door frame sheet thickness: 2 mm
- Structured door leaf sheet thickness: 1 mm x 2
- Door panel stuffing: Rock wool/honey comb paper and strengthen with middle panels
- Lock multi-point, multi-position lever and half circle locking systems, sawing resistant lock point
- > UV protected, termite, sound and dust proof, anticorrosive,
- > Cylinder: Super prying resistant
- Copper coated 304 SS hinges and peep hole viewer.
- Easy to install, aesthetic finish
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR



IL GL JP02 TW-220

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVALUME SHEETS WITH SUPERIOR LOCKS, HARDWARES AND ACCESSORIES WITH SEVERAL UNIQUE FEATURES

- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- > Door panel stuffing: Rock wool/honey comb paper and strengthen with middle panels
- Lock multi-point, multi-position lever and half circle locking systems, sawing resistant lock point
- > UV protected, termite, sound and dust proof, anticorrosive,
- > Cylinder: Super prying resistant
- > Copper coated 304 SS hinges and peep hole viewer.
- > Easy to install, aesthetic finish
- Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY





— IL GL JP05

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVALUME SHEETS WITH SUPERIOR LOCKS, HARDWARES AND ACCESSORIES WITH SEVERAL UNIQUE FEATURES

- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- Door panel stuffing: Rock wool/honey comb paper and strengthen with middle panels
- Lock multi-point, multi-position lever and half circle locking systems, sawing resistant lock point
- > UV protected, termite, sound and dust proof, anticorrosive,
- > Cylinder: Super prying resistant
- > Copper coated 304 SS hinges and peep hole viewer.
- > Easy to install, aesthetic finish
- Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY



IL GL SM JP 02

IL GL SM18 T-220

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVALUME SHEETS WITH SUPERIOR LOCKS, HARDWARES AND ACCESSORIES WITH SEVERAL UNIQUE FEATURES

- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- > Door panel stuffing: Rock wool/honey comb paper and strengthen with middle panels
- Lock multi-point, multi-position lever and half circle locking systems, sawing resistant lock point
- > UV protected, termite, sound and dust proof, anticorrosive,
- > Cylinder: Super prying resistant
- > Copper coated 304 SS hinges and peep hole viewer.
- > Easy to install, aesthetic finish
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY



IL GL SM18

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVALUME SHEETS WITH SUPERIOR LOCKS, HARDWARES AND ACCESSORIES WITH SEVERAL UNIQUE FEATURES

- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- Door panel stuffing: Rock wool/honey comb paper and strengthen with middle panels
- Lock multi-point, multi-position lever and half circle locking systems, sawing resistant lock point
- > UV protected, termite, sound and dust proof, anticorrosive,
- > Cylinder: Super prying resistant
- > Copper coated 304 SS hinges and peep hole viewer.
- > Easy to install, aesthetic finish
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR



ILGLSMXY6

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVALUME SHEETS WITH SUPERIOR LOCKS, HARDWARES AND ACCESSORIES WITH SEVERAL UNIQUE FEATURES

- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- > Door panel stuffing: Rock wool/honey comb paper and strengthen with middle panels
- Lock multi-point, multi-position lever and half circle locking systems, sawing resistant lock point
- > UV protected, termite, sound and dust proof, anticorrosive
- > Cylinder: Super prying resistant
- > Copper coated 304 SS hinges and peep hole viewer.
- > Easy to install, aesthetic finish
- Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY







- IL GL SM XS4

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVALUME SHEETS WITH SUPERIOR LOCKS, HARDWARES AND ACCESSORIES WITH SEVERAL UNIQUE FEATURES

- > Structured door frame sheet thickness: 2 mm
- Structured door leaf sheet thickness: 1 mm x 2
- > Door panel stuffing: Rock wool/honey comb paper and strengthen with middle panels
- Lock multi-point, multi-position lever and half circle locking systems, sawing resistant lock point
- > UV protected, termite, sound and dust proof, anticorrosive
- > Cylinder: Super prying resistant
- > Copper coated 304 SS hinges and peep hole viewer.
- > Easy to install, aesthetic finish
- Attractive handles & high quality hardwares

READY TO INSTALL DOOR









IL GL SM 17 E

IL GL XH 3



IL GL 20 E

IL GL 20

IL GL 17



ı



7 IL GL SM 20



IL Gi SM 50T

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness 88 mm
- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks
- > Additional secondary Security lock with 6 keys
- Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof,
- > Attractive handles & high quality hardwares



II Gi 50 T

IL Gi 50E



- READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES
- > Door leaf thickness 88 mm
- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks
- > Additional secondary Security lock with 6 keys
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

IL Gi SM12

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness: 67 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.8 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Available in different sizes
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY

IL Gi 12-220

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- > Door Panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Available in different sizes
- > Attractive handles & high quality hardwares



IL Gi 1

IL Gi 66



IL Gi 66 TW

- > Door leaf thickness 67 mm (220 mm frame)
- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- Multi point, multi position, single key operated lever locks.
- Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Available in different sizes
- > Attractive handles & high quality hardwares



IL Gi SM 66

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness 67 mm (220 mm frame)
- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- > Door panel stuffing with rock wool / honey comb paper
- Multi point, multi position, single key operated lever locks.
- Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Available in different sizes
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY

IL Gi SM 818 T-220

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- > Door Panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Available in different sizes
- > Attractive handles & high quality hardwares



IL Gi 818 E

- IL Gi SM 1614

— IL Gi 1614-220



- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness:1.5 mm
- > Structured door leaf sheet thickness : 0.8 mm x 2
- > Door Panel stuffing with Rock wool / honey comb paper
- Multi point, multi position, single key operated lever locks.
- > Matt Finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- Attractive handles & high quality hardwares



IL Gi 1614



IL Gi SM 1218-220

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 2 mm
- > Structured door leaf sheet thickness: 1 mm x 2
- > Door Panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Available in different sizes
- > Attractive handles & high quality hardwares


READY TO INSTALL DOOR

MADE OF HIGH QUALITY



- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.8 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

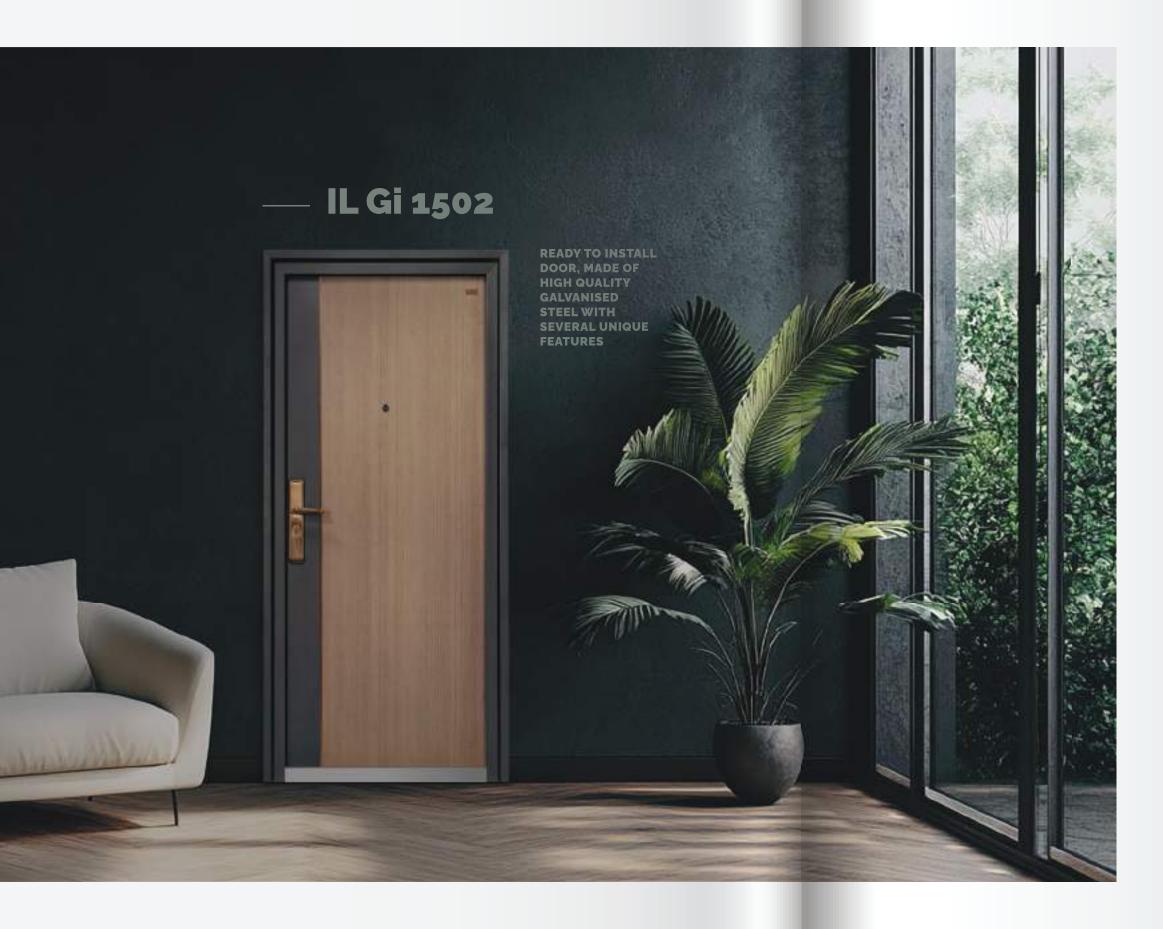



- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.8 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

IL Gi 47

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.8 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY

IL Gi JP05

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.8 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- Matt finish Heat Transmission
 Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR






- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.8 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

IL Gi PA SM

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.8 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares



IL Gi PA

IL Gi PA DW

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES

- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.8 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares



READY TO INSTALL DOOR

MADE OF HIGH QUALITY

ndles are optional, not part of standard door.

IL Gi SM AS03

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH **SEVERAL UNIQUE FEATURES**



- Door leaf thickness 67 mm
- Structured door frame sheet thickness: 1.5 mm
- Structured door leaf sheet thickness: 0.8 mm x 2
- Door panel stuffing with Rock wool / honey comb paper
- Multi point, multi position, single key operated lever locks.
- Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares



IL Gi AS03 DW 220

READY TO INSTALL DOOR, MADE OF **HIGH QUALITY** GALVANISED **STEEL WITH SEVERAL UNIQUE FEATURES**

- Structured door frame sheet thickness: 2 mm
 - > Structured door leaf sheet thickness: 1 mm x 2

> Door leaf thickness 67 mm

- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares



READY TO INSTALL DOOR



IL Gi ASo3 TW

- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.8 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares



IL Gi 44T

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES





- > Door leaf thickness 67 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.8 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

IL Gi SM AD021



- > Door leaf thickness 50 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.7 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares



IL Gi 44T

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness 50 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.7 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY IL GI 44E

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness 50 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.7 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks.
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

IL Gi 63E READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES

IL Gi 63T



- > Door leaf thickness 50 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.7 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

IL Gi 37T

READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES



- > Door leaf thickness 50 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.7 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY

IL Gi AS03



- READY TO INSTALL DOOR, MADE OF HIGH QUALITY GALVANISED STEEL WITH SEVERAL UNIQUE FEATURES
- > Door leaf thickness 50 mm
- > Structured door frame sheet thickness: 1.5 mm
- > Structured door leaf sheet thickness: 0.7 mm x 2
- > Door panel stuffing with Rock wool / honey comb paper
- > Multi point, multi position, single key operated lever locks
- > Matt finish Heat Transmission Painting Technology (MHTPT)
- > Termite, sound and dust proof, anti corrosive
- > Attractive handles & high quality hardwares

READY TO INSTALL DOOR

MADE OF HIGH QUALITY *Please note: The color and design of the product may vary from images screens or in printed materials due to differences in color calibration. Westfixing the product in green before purchase

